

FIG. 1
(PRIOR ART)

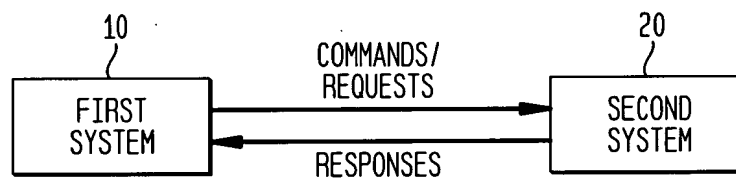


FIG. 2

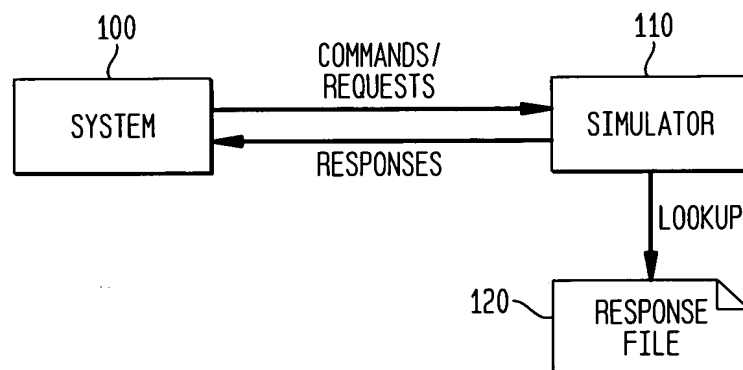


FIG. 3A

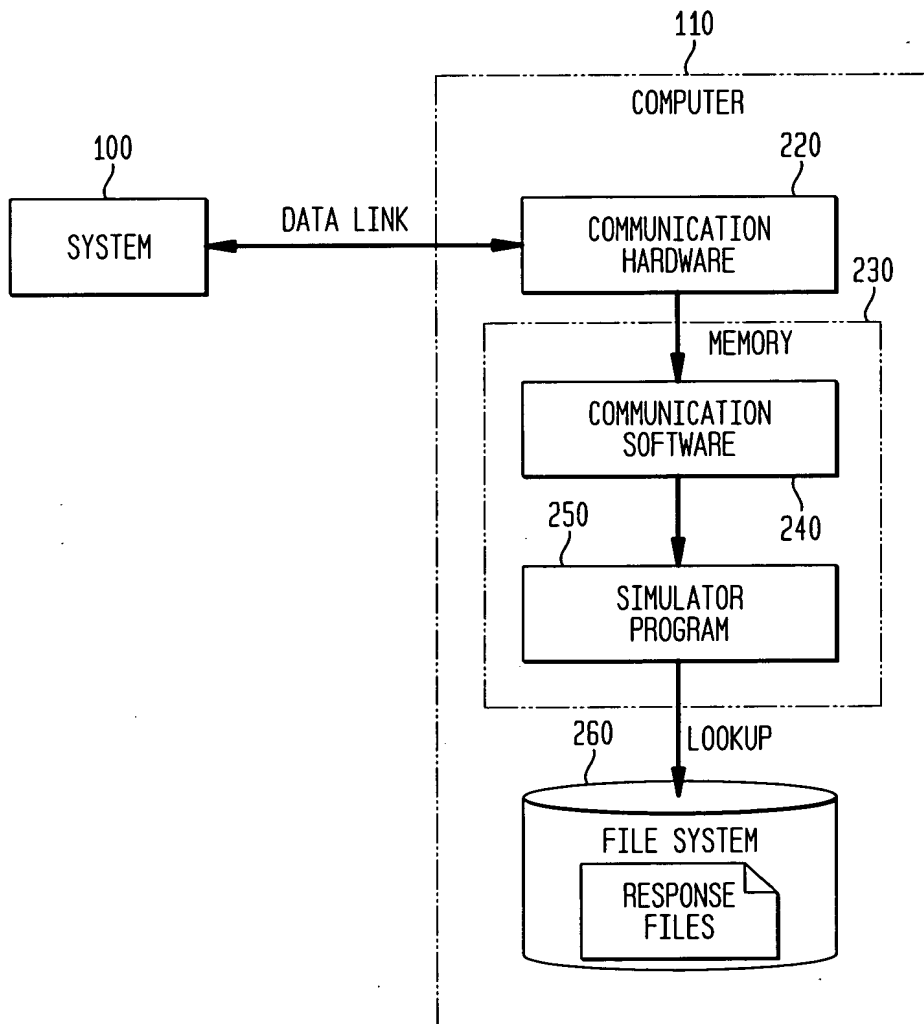


FIG. 3B

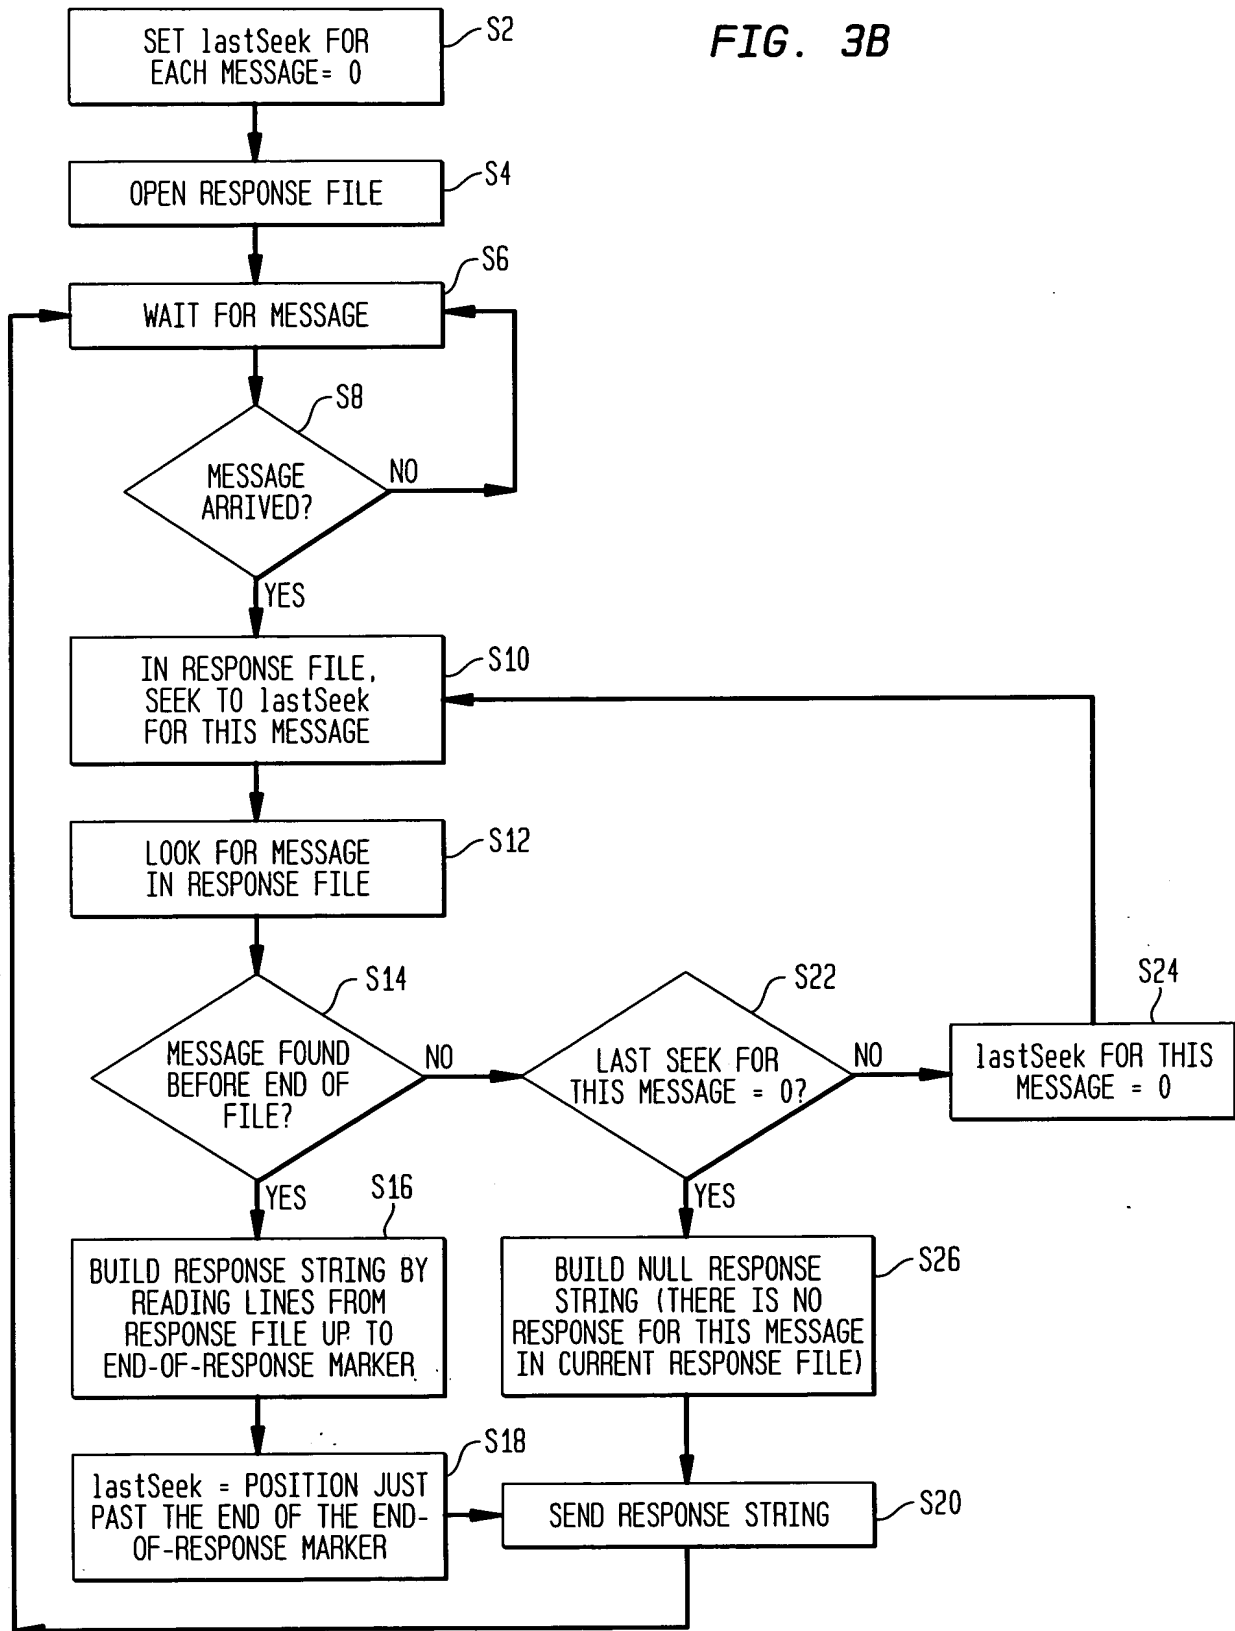


FIG. 3C

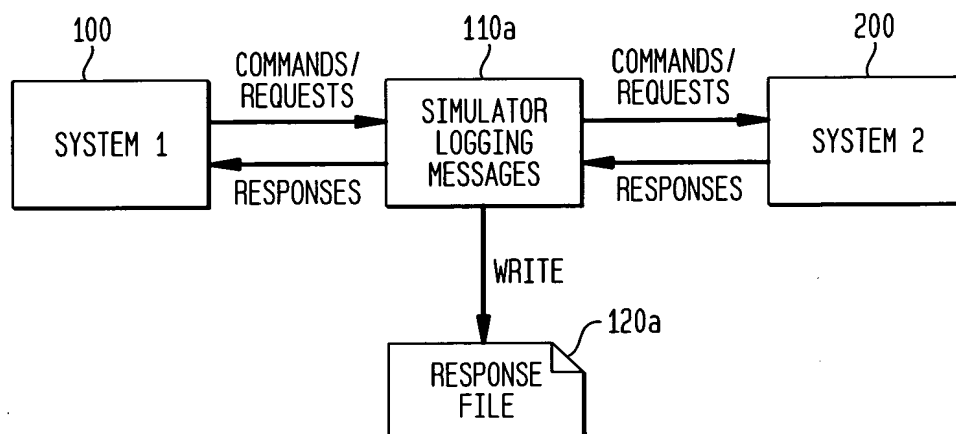


FIG. 4A

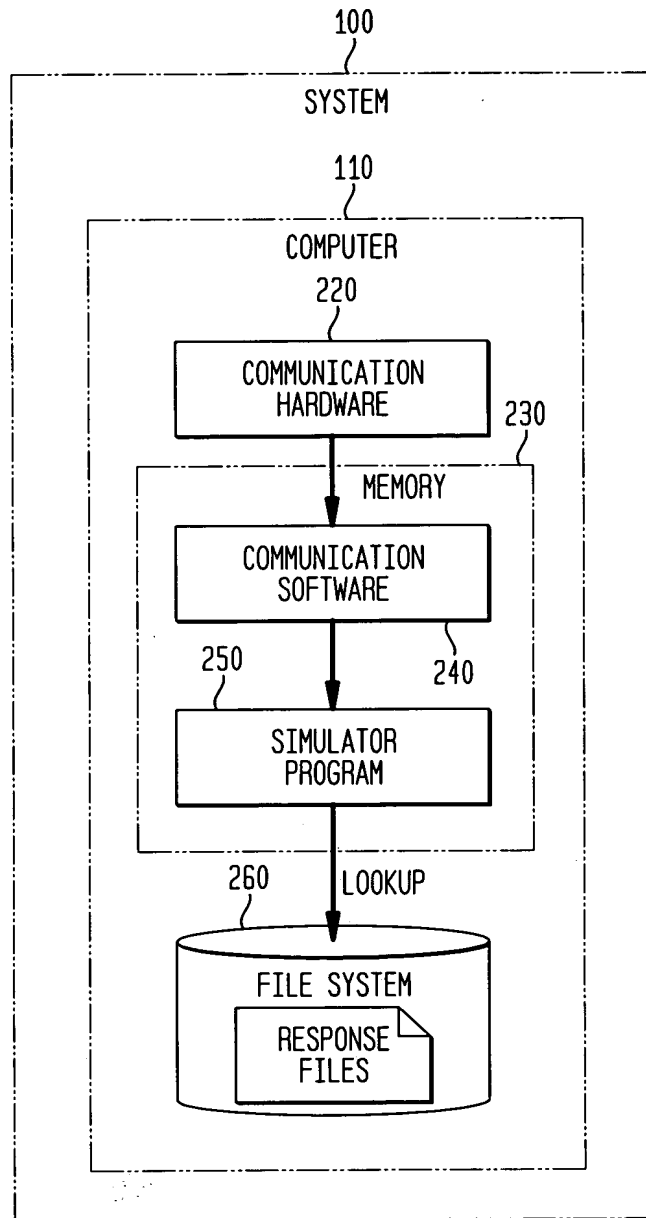


FIG. 4B

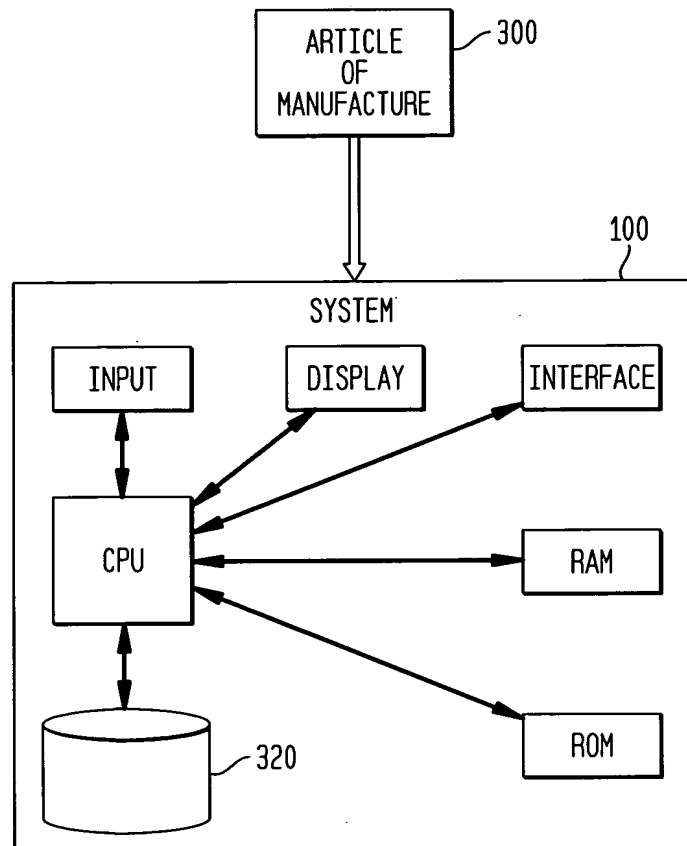


FIG. 5

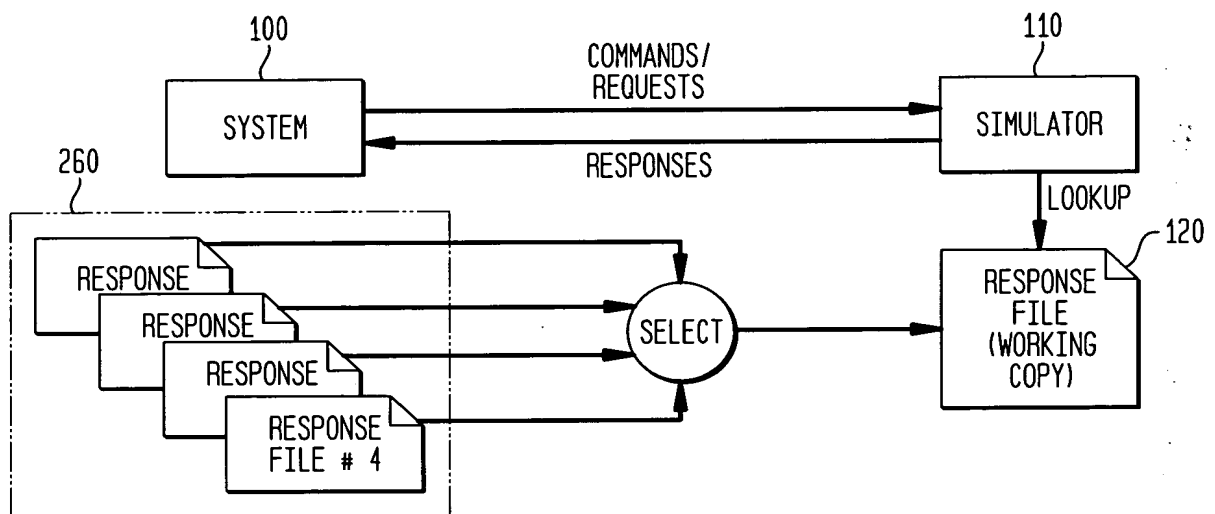


FIG. 6

300

SimpleSim Options

Message Marker 310

Send Message Marker ☒ 320 330

End Message Marker

Send End Message Marker ☒ 340

Response File 350

D:\Apwg\1VB5\1wizgen\SimplerWiz\SocketSimpleSim\responses.txt

Change Response File 360

Cancel 370

OK 380

FIG. 7

400

The image shows a screenshot of a software application window titled "SimpleSim". The window has a standard Mac OS-style title bar with minimize, maximize, and close buttons. Below the title bar, there are two menu items: "Options" and "Monitor". The main content area is divided into several sections. The first section is titled "Socket Communications" and contains two input fields: "Host" with the value "nj0117pgillis.wh.lucent.com" and "Port" with the value "2300". Below this is a "Status" section, which is labeled with the number 440. It contains a text area displaying "Listening" and an empty text area below it. At the bottom of the window, there are three buttons: "Start Sim" (labeled 410), "Stop Sim" (labeled 420), and "Quit" (labeled 430). To the left of the "Start Sim" button is a checked checkbox labeled "IL1 Server". Above the "Start Sim" button is a text label "Received:" followed by an empty text box. To the right of this text box is a text label "Sent: 0".

SimpleSim

Options Monitor

Socket Communications

Host nj0117pgillis.wh.lucent.com

Port 2300

Status

Listening

Received: Sent: 0

Start Sim Stop Sim Quit

☒ IL1 Server

410 420 430

FIG. 8

500

